


FACTS

A successful installation of LivePicture GO, LivePicture, LivePanel and LivePanel PACK is dependent on the availability of light at the location. Not all locations have sufficient light while plant growth is dependent on the so called daylight spectrum. LiveSpectrum is a series of light fittings specially developed to simulate and emulate natural daylight. These can be surface-mounted or recess-fitted.

These LED fixtures have full spectrum colour rendering and are available in various light intensities. The LiveSpectrum luminaires (lighting units) are suitable for mounting on or fixing into ceilings and are equipped with energy-saving long-life LEDs. The LED lights are also dimmable to allow the user to select suitable brightness levels for all LivePicture and LivePanel products.


- Plants need full-spectrum light
- 1000 – 2000 lux
- 10 hours per day
- It may be necessary to make a lighting calculation

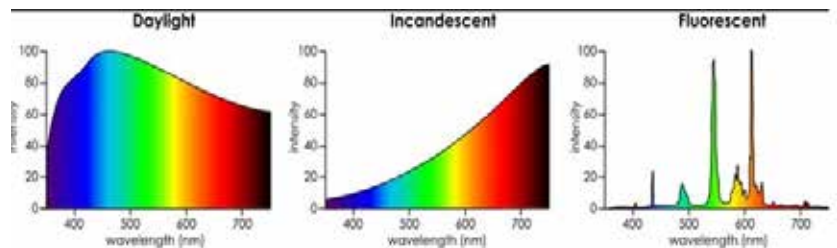


## LIVESPECTRUM MOBILIGHT FEATURES

- Bulb colours available from warm to natural white; 2700k, 3000k, 3500k and 4000k
- Excellent replication of natural light temperatures
- Adjustable luminaire with a 3-phase track (surface-mounted)
- 350° horizontally rotatable and vertically 90° adjustable (surface-mounted)
- Easy to attach to ceiling systems (surface-mounted)
- Can be suspended with suspension fitting (surface-mounted)
- Lens and reflector options available to group or spread the light beam
- Luminaires available in white, silver grey and black
- Luminaires can be dimmed



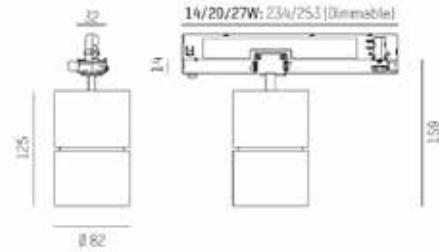









Track

## MobiLight Track





Controls

Finished










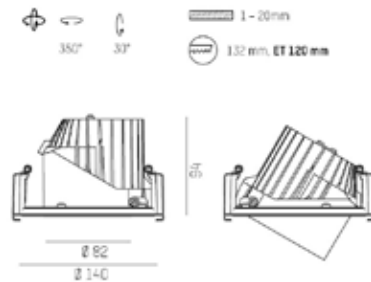
Bulb Colours







Power	14-27W
Lumen Output	1500-2770lm
Colour Fastness	CRi90+

Light Beams











Recessed

## MobiLight R





Controls

Finishes










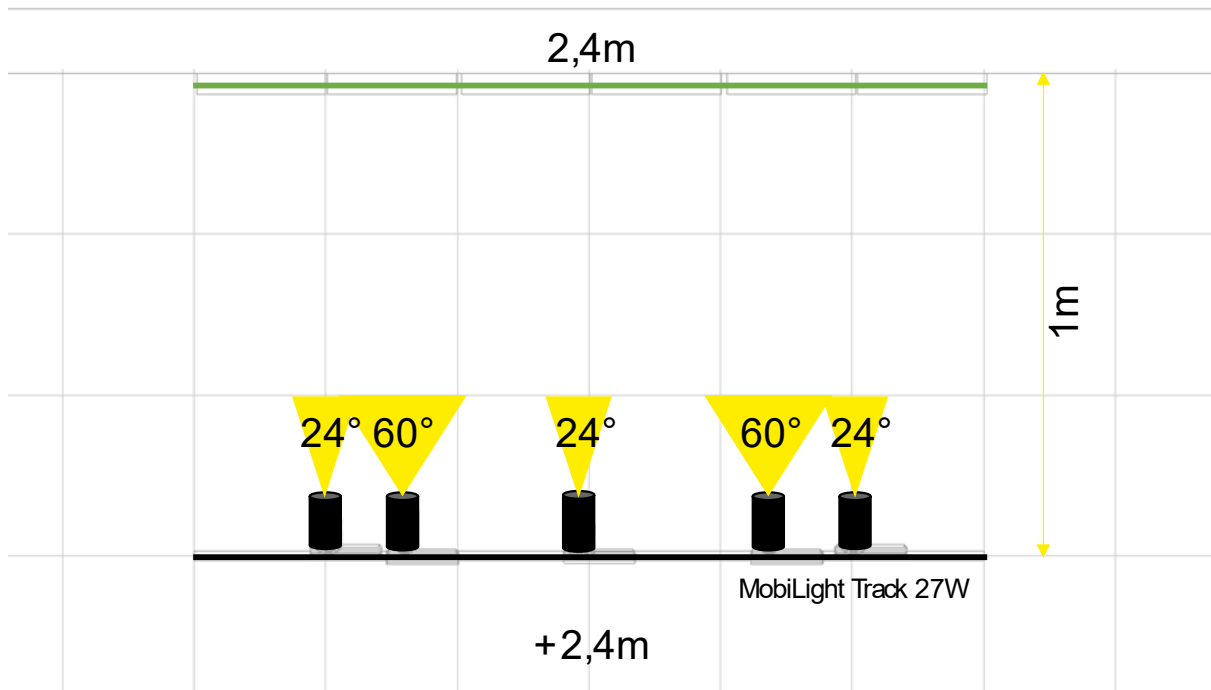
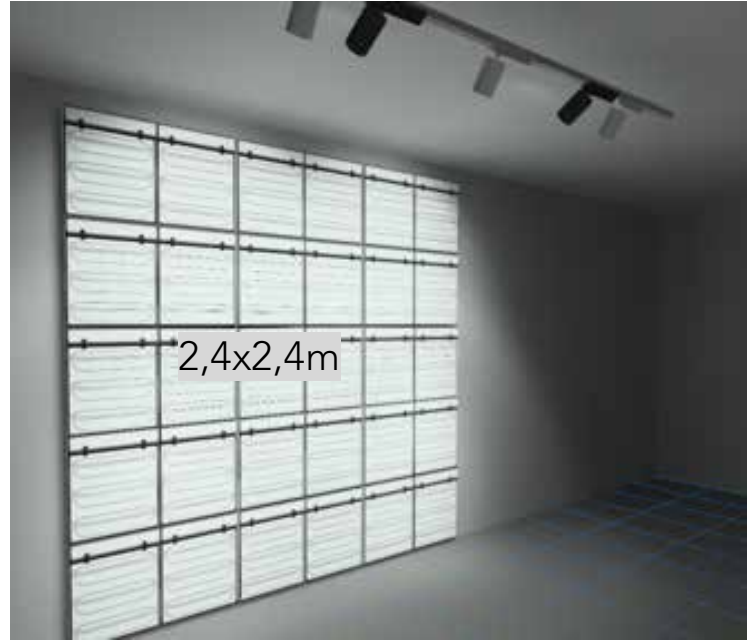
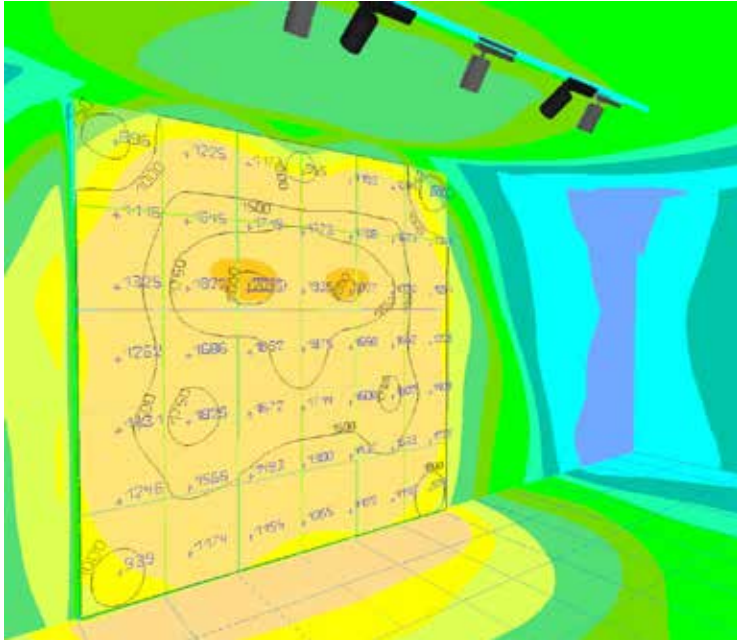
Bulb Colours


Power	12-35W
Lumen Output	1500-4100lm
Colour Fastness	CRi90+

Light Beams









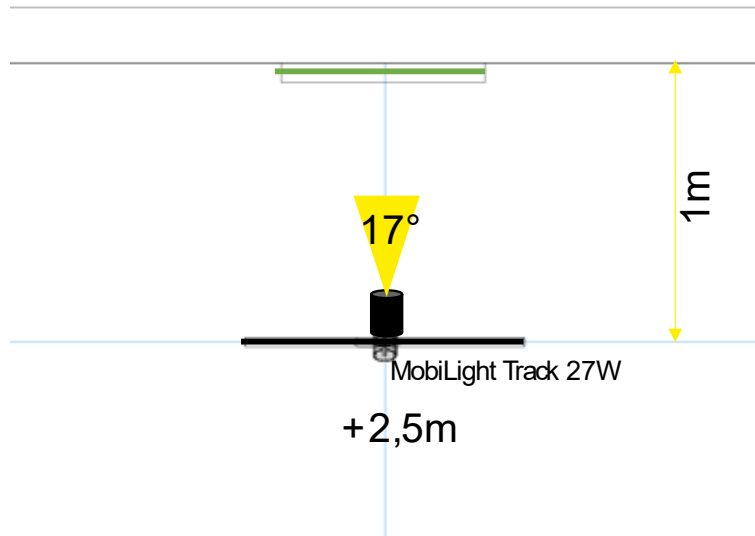



LivePanel Indoor

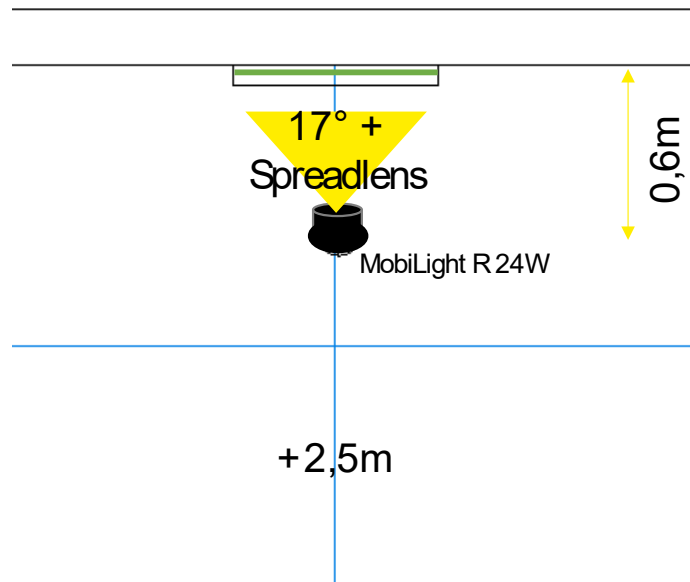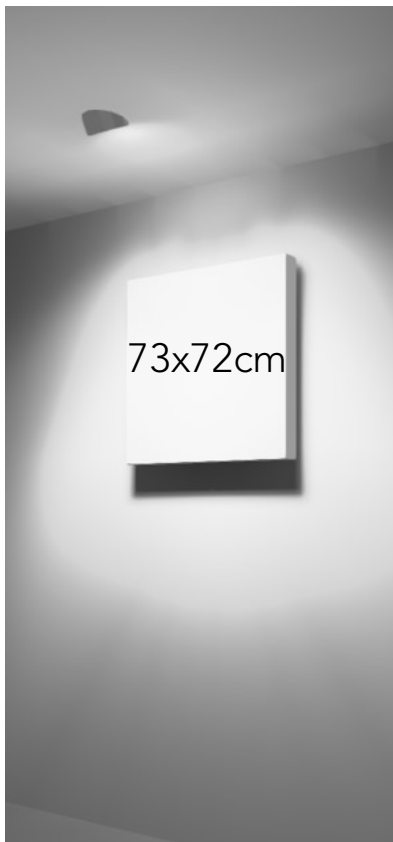



Requirements		Quantity
3-Phase Track white   black   grey	1m	1
Starter white   black   grey		1
End Cap white   black   grey		1
Nounting Block white   black   grey		2
MobiLight Track 27W	On/Off	1





Requirements		Quantity
MobiLight R 24W	Excl. driver	1
Spread Lens		1
Driver	On/off	1

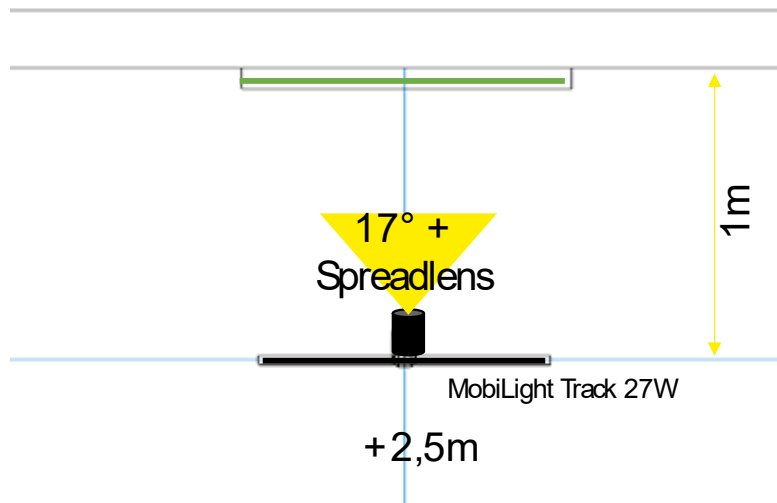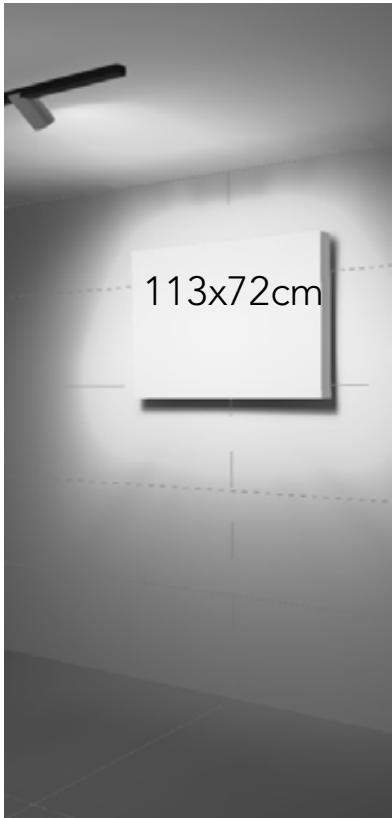



Requirements		Quantity
3-Phase Track white   black   grey	1m	1
Starter white   black   grey		1
End Cap white   black   grey		1
Nounting Block white   black   grey		2
MobiLight Track 27W	On/Off	1
Spread Lens		1

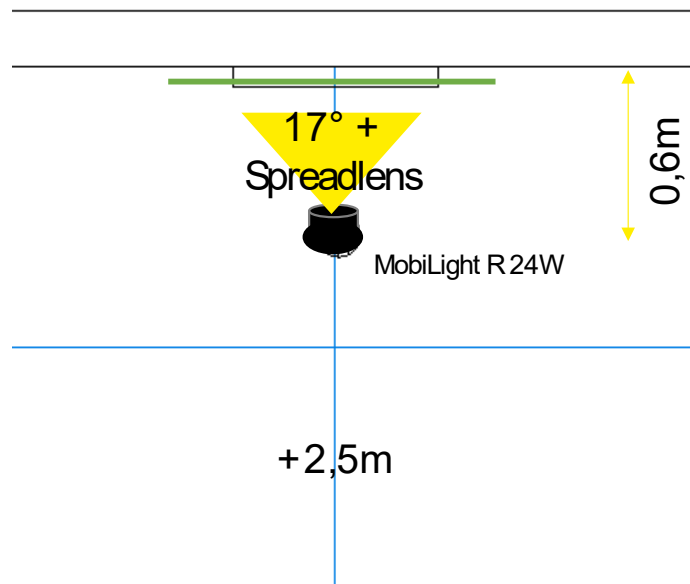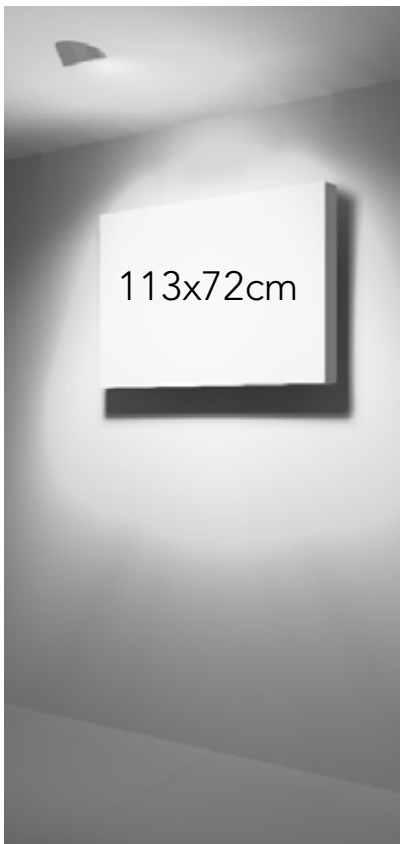


Requirements		Quantity
MobiLight R 24W	Excl. driver	1
Lens Spread		1
Driver	On/off	1

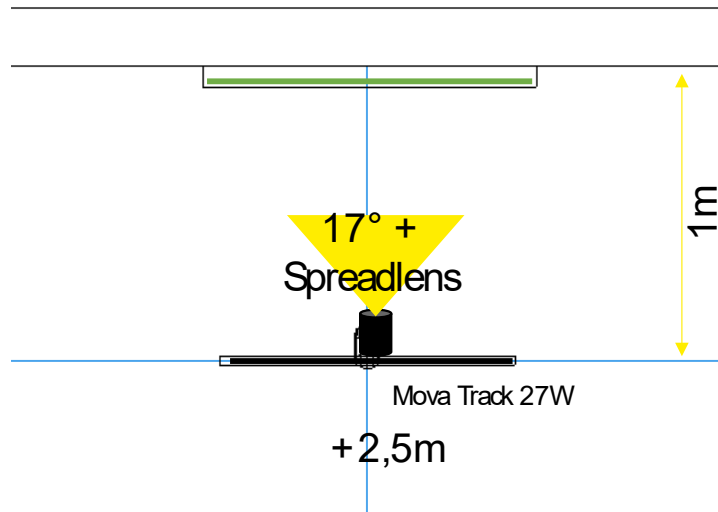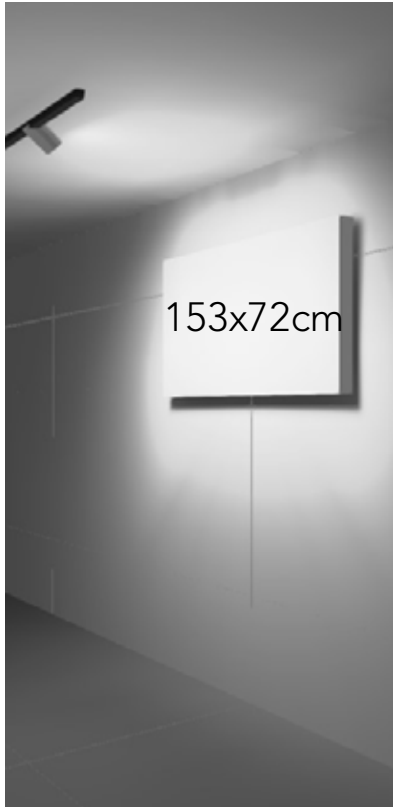


Requirements		Quantity
3-Phase Track white   black   grey	1m	1
Starter white   black   grey		1
End Cap white   black   grey		1
Nounting Block white   black   grey		2
MobiLight Track 27W	On/Off	1
Spread Lens		1

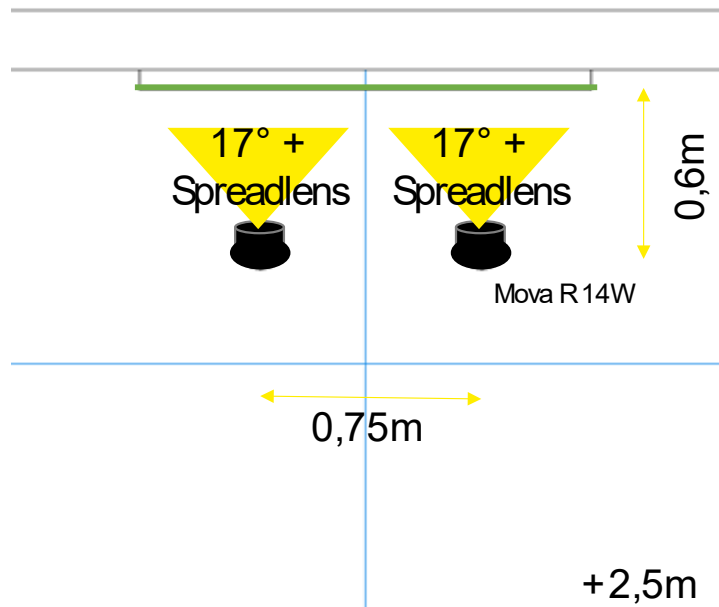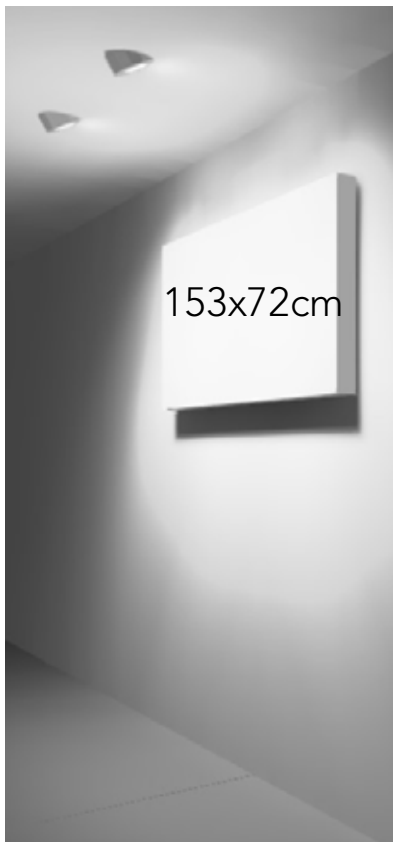

Requirements		Quantity
MobiLight R 14W	Excl. driver	2
Lens Spread		2
Driver	On/off	2

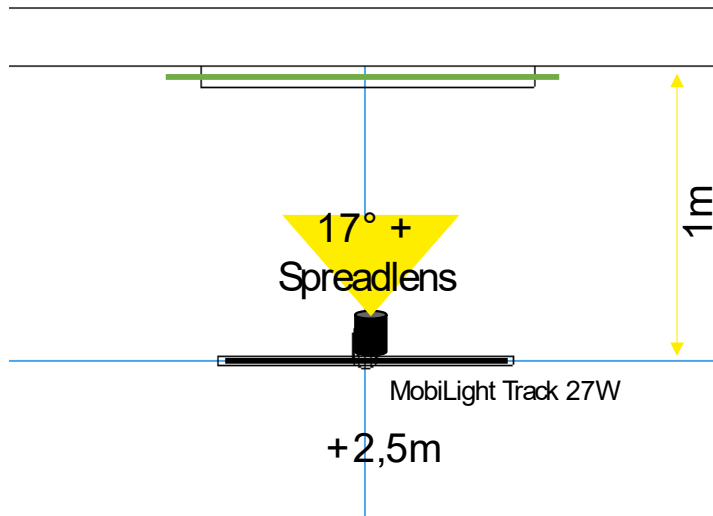


Requirements		Quantity
3-Phase Track white   black   grey	1m	1
Starter white   black   grey		1
End Cap white   black   grey		1
Nounting Block white   black   grey		2
MobiLight Track 27W	On/Off	1
Spread Lens		1


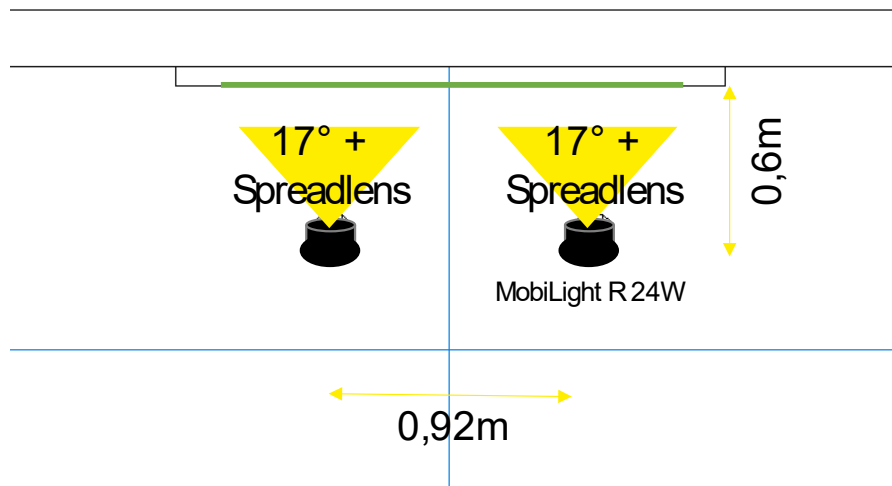


Requirements		Quantity
MobiLight R 24W	Excl. driver	2
Lens Spread		2
Driver	On/off	2



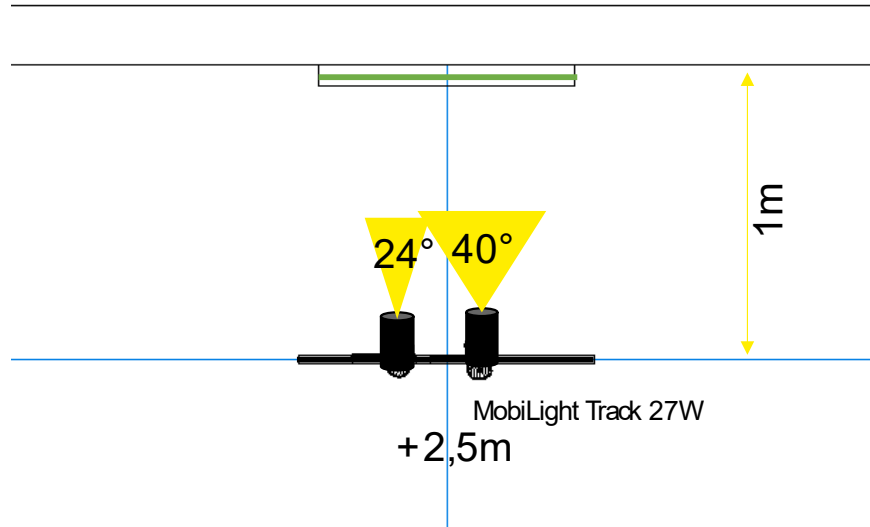


Requirements		Quantity
3-Phase Track white   black   grey	1m	1
Starter white   black   grey		1
End Cap white   black   grey		1
Nounting Block white   black   grey		2
MobiLight Track 27W24°	On/Off	1
MobiLight Track 27W40°	On/Off	1

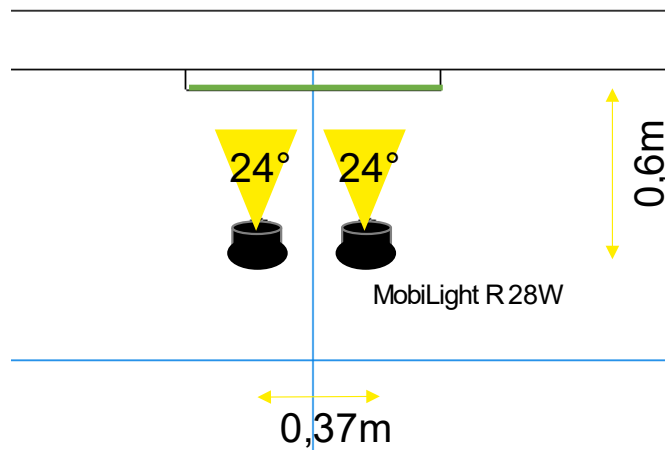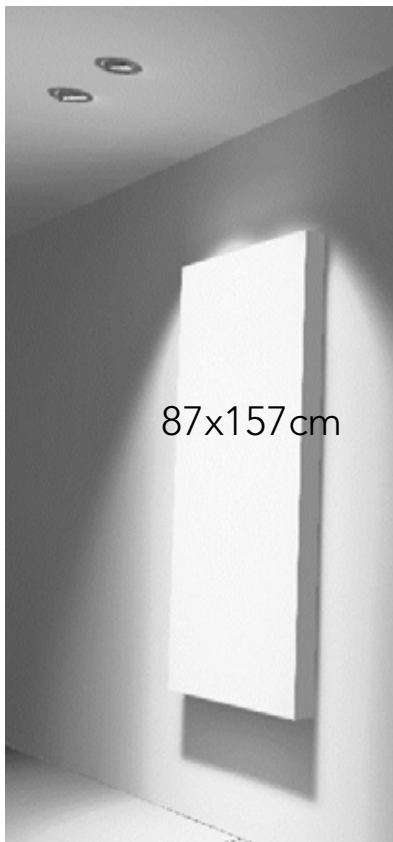



Requirements		Quantity
MobiLight R 28W24°	Exd. driver	2
Driver	On/off	2

LivePanel PACK 2 x 3



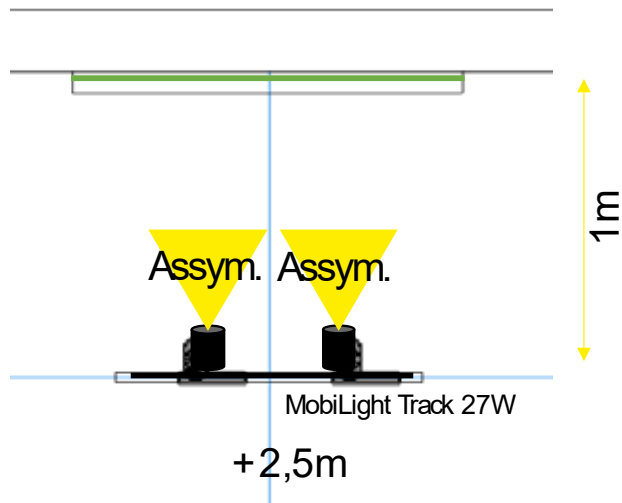


Requirements		Quantity
3-Phase Track white   black   grey	1m	1
Starter white   black   grey		1
End Cap white   black   grey		1
Nounting Block white   black   grey		2
MobiLight Track 27W assym	On/Off	1

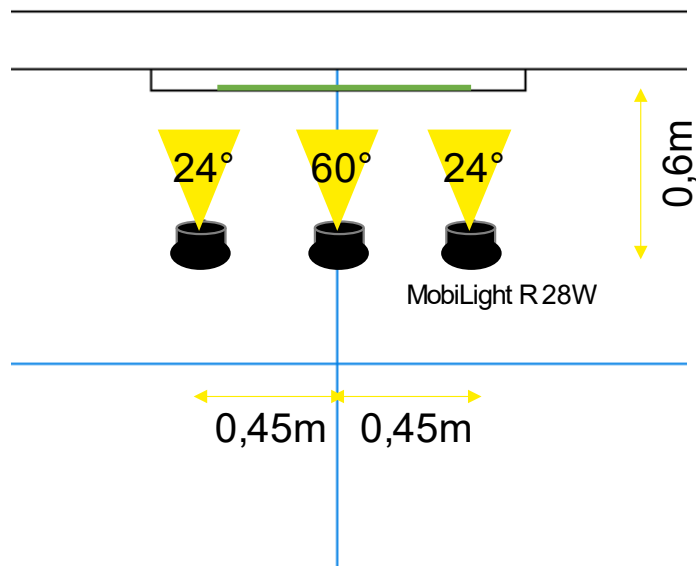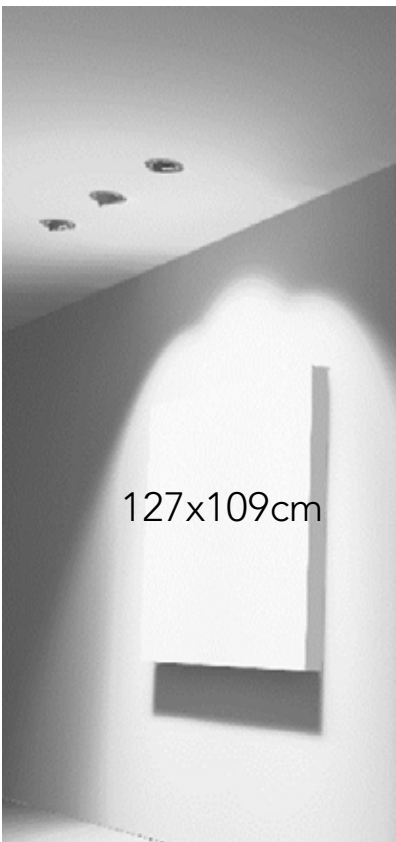


Requirements		Quantity
MobiLight R28W24°	Excl. driver	2
MobiLightR28W60°	Excl. driver	1
Driver	On/off	3

LivePanel PACK 3 x 2

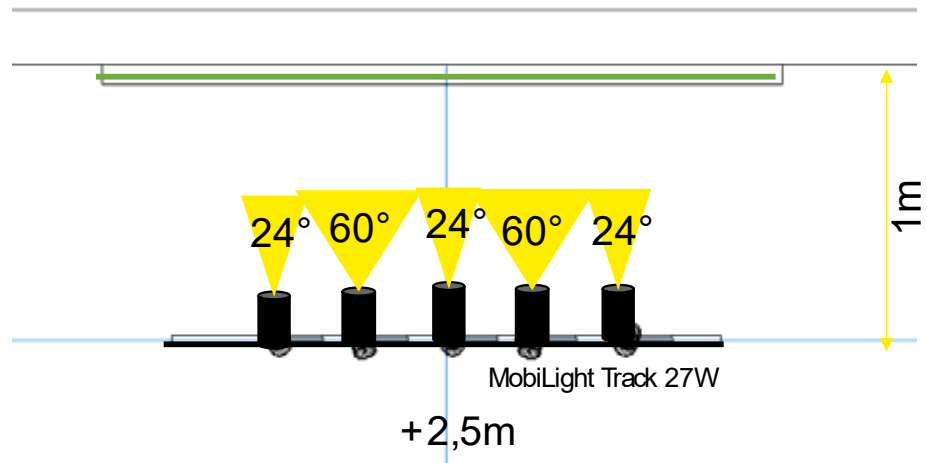


Requirements		Quantity
3-Phase Track white   black   grey	1m	1
Starter white   black   grey		1
End Cap white   black   grey		1
Nounting Block white   black   grey		3
MobiLight Track 27W24°	On/Off	3
MobiLight Track 27W60°	On/Off	2

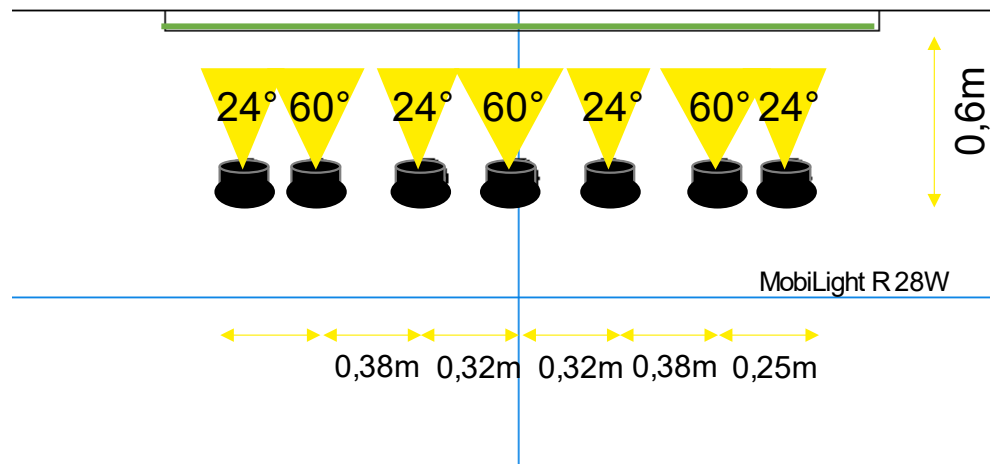





Requirements		Quantity
MobiLight R28W24°	Excl. driver	4
MobiLight R28W60°	Excl. driver	3
Driver	On/off	7

LivePanel PACK 6 x 4



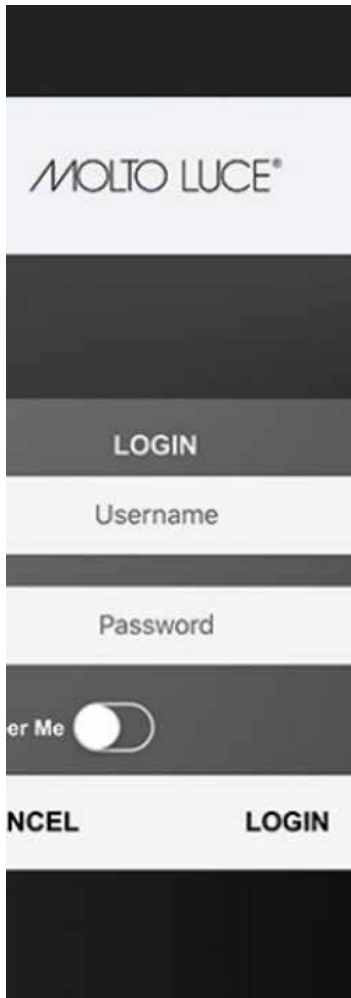

Use the Molto Luce Smart APP to control the lighting system. Whether a single luminaire, group or the entire network, the app allows you to programme timing schedules to suit.

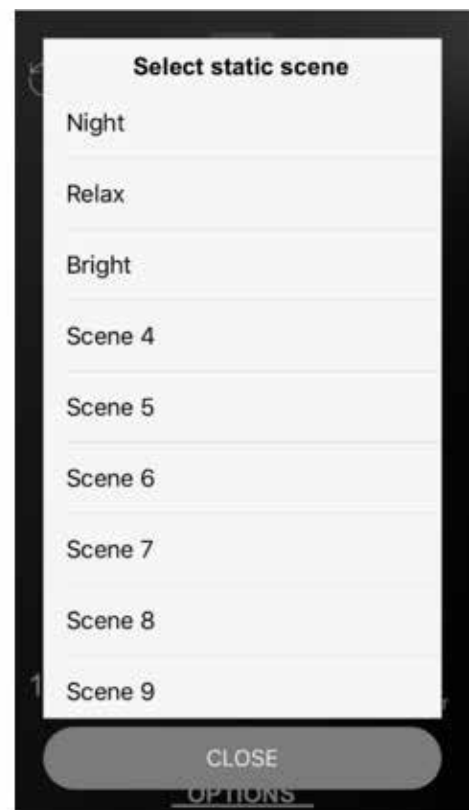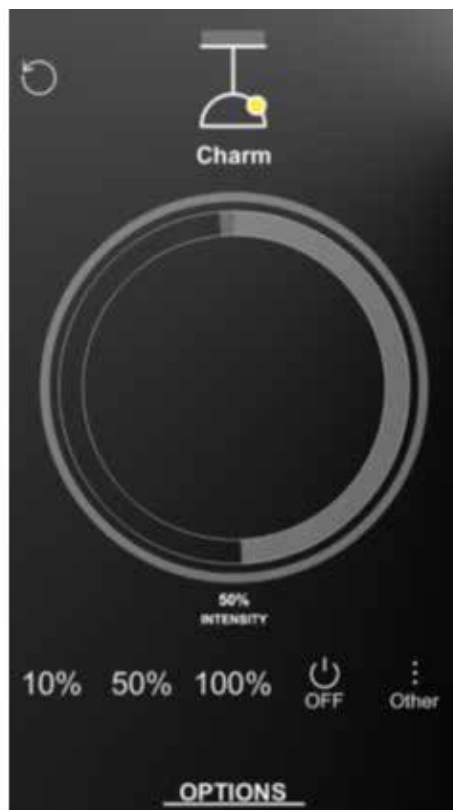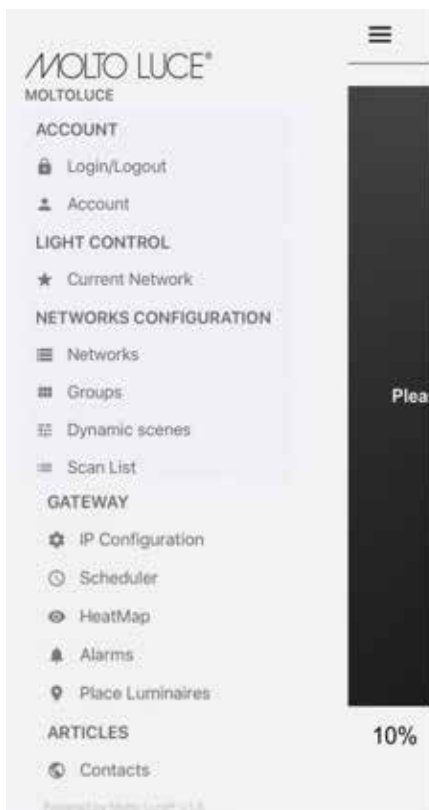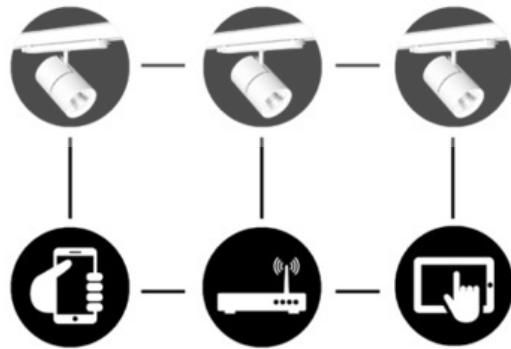



### Your Mobilane Checklist

Project Name   
 Location   
 Mobilane Account Manager 
 Expected delivery date

Living Wall Dimensions (Length x Height)   
 Ceiling Type (e.g. Concrete | Wood | Suspended Ceiling)   
 Ceiling Height (in cm)   
 230vac present? (Indicate location in Site Sketch)

Site Sketch:

Type of luminaire (Recessed/Track)   
 Luminaire finish (White | Black | Grey)   
 Bulb colour (2700 | 3000 | 3500 | 4000K)   
 Control (On/Off | DALI | Bluetooth)   
 Other information:

Amount of Lux (standard 1000lx)   
 Room function: (Meeting room, Entrance etc.)

### Choose your lighting options

Recessed or Track 
 Degree Bundle

Finish (White/black/grey) 
 Control (On-Off/DALI/Bluetooth)

Power  W<sub>(attage)</sub>
 Accessory(s) (Spread Lens/Honeycomb)

Light colour  K<sub>(elvin)</sub>

Quantities

### Choose your track options

Length of Track  cm  
 Finish (White/black/grey)   
 Ceiling Mounted or suspended

Site Sketch:

#### Light Beam Spread



#### Bulb colours



#### Finished



#### Controls

